


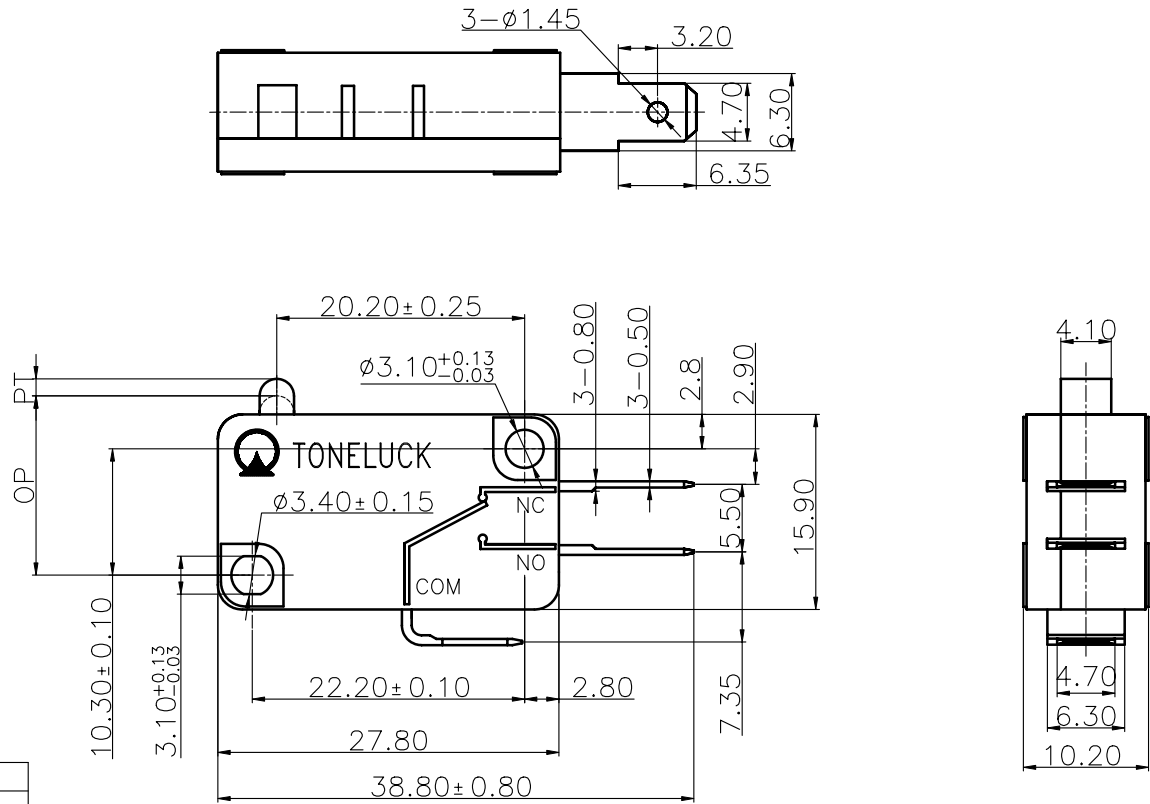


机械参数:	
项 目	标 准
操作力	100 $\pm$ 25gf
回复力	20gf Min.
动作位置	14.7 $\pm$ 0.5mm
差程	0.4 mm Max.
行程	1.2mm Max.
过行程	1.25mm Min.

电性能:	
额定负载	操作寿命
22A 125/250VAC;1HP 125VAC;2HP 250VAC	6,000 次带负载 (UL-cUL)
12A 125VL	6,000 次带负载 (UL-cUL)
15.1A 125/250VAC	100,000 次带负载 (UL-cUL)
22(8)A 125/250VAC	10,000 次带负载 (ENEC,CQC)
绝缘电阻:	100M Ω Min.
抗电强度:	1000VAC(50~60HZ) — 非接触端子间
	1500VAC(50~60HZ) — 端子与接地(外壳) — 端子与非载流金属部件间

其它参数:	
机械寿命:	1,000,000 次
使用温度环境:	-40 $^{\circ}$ C~+125 $^{\circ}$ C

材料清单	
胶座	热塑性塑料, UL94 V-0
胶盖	热塑性塑料, UL94 V-0
端子	铜合金, 镀银
按垫	热塑性塑料, UL94 V-0
触点	银合金



MASS PRODUCTION RELEASE					
Tolerance Unless Otherwise Specified					
~3	>3~10	>10~30	>30~80	>80~180	Angle
±0.20	±0.30	±0.40	±0.60	±0.80	±3°
Unit: mm		Size: A4		Scale:	
THIRD ANGLE		TONELUCK Switches & Control Solutions			

Project Ref:	E SERIES MICROSWITCH				
Part No:	E53AL-BN00Ag-01				
Drawing No:	- - -	Eng Ver	A1		
Drafted by:	蔡庆功	Date:	2011-2-11		
Checked by:	姜华庆	Date:	2011-2-11		
Approved by:	许小云	Date:	2011-2-11		