

TONELUCK

Push Button Switch

PB Push Button Switch Product Specifications

File/Edition: PBN-3-17.5H-0116-SPC.001

Description: Push Button Switch

Customer Name:

Model No.: PB (Series)

Customer P/N:

Toneluck P/N: PBN-3-17.5H-0116

Representative:

Project Code:

Specifications Receipt Confirmation

Received by: _____

Title: _____

Signature: _____

Date: _____

Remark:

1. This product specification is considered as the technical agreement between the receiving customer and Toneluck. Any information on the general product catalog which is in conflict with or different from the corresponding information of this document is considered as invalid.
2. If customer issue purchase orders without confirmation by signature of this specification after receipt, such confirmation will be considered as granted upon receipt of the first purchase order.

Prepared by: Binky wan 2022-11-16

Checked by: Wang Xunlei 2022-11-16

Approved by: Jerry 2022-11-16

Customer P/N:	Toneluck P/N: PBN-3-17.5H-0116	Project Code:
Product Version: A1	Issued Date: 2022-11-16	Page 1 of 6

1. General Characteristics

1.1 Application:	Suitable for all kinds of audio products, measuring instruments and electronic equipments.
1.2 Operating Temperature Range :	-10°C to +60°C
1.3 Operating Relative Humidity :	≤96%RH at +40°C
1.4 Test Conditions :	Unless otherwise specified, the atmospheric conditions for making measurements and tests are as follows :
	Ambient Temperature : 15~35°C
	Relative Humidity : 45%~85%
	Air Pressure : 86~106kPa (860~1060mbar)

2. Appearance, Structure & Dimensions

2.1 Appearance:	The switch shall have good finishing, and no rust, crack or plating defects.
2.2 Structure & Dimensions:	Refer to individual product drawing.
2.3 Markings:	Refer to individual product drawing.

3. Ratings & Life

Ratings	Operating Life with Load
Refer to individual product drawing	


4. Electrical Characteristics

Item	Criteria	Test Method
4.1 Contact Resistance	50mΩ Max.	Measured by a voltage drop method at 1A Max. 5VDC. Any equipment with error not more than 5% can be used. Resistance after test is the average of 5 successive measurements.
4.2 Insulation Resistance	100MΩ Min.	500VDC voltage is applied between each pair of terminals and between the terminal and the metal frame for 60±5s.
4.3 Dielectric Voltage	No dielectric breakdown shall occur.	1000VAC (50~60Hz, cut-off current 2mA) is applied between non-connected terminals and between terminals and the metal frame for 60±5s.

5. Mechanical Characteristics

Item	Criteria	Test Method
5.1 Operating Force	Refer to individual product drawing	A static load shall be applied to the tip of actuator in operating direction. For all uses, the operating force has to be applied with a 5° maximum angle relating to the plunger axis.
5.2 Travels	Refer to individual product drawing	
5.3 Terminal Strength	<ul style="list-style-type: none"> - Shall be free from terminal looseness, damage and insulator breakage. - The electrical performance requirements specified in section 4 shall be satisfied. 	A static load of 5N shall be applied to the tip of terminal in a desired direction for 1 min. The test shall be done once per terminal.

Customer P/N:	Toneluck P/N: PBN-3-17.5H-0116	Project Code:
Product Version: A1	Issued Date: 2022-11-16	Page 2 of 6

5.4	Strength of operating section	-Shall be free from pronounced wobble bending and mechanical abnormalities.	-A static load of 30N shall be applied in the operating direction for 15s. -A static load of 15N shall be applied in the pulling direction for 15s. -A static load of 15N shall be applied in the perpendicular direction of operation at the tip of actuator for 15s.						
5.5	Vibration Proof	After test, - Contact resistance: 100mΩ Max. - Insulation Res.: 50MΩ Min. - Electrical performance requirements specified in item 4.3 shall be satisfied. -Operating force: Within ±10%of specified value. -No abnormalities shall be recognized in appearance and construction.	Switch shall be secured to a testing machine by a normal mounting device and method. Switch shall be measured after following test. (1) Vibration frequency range = 10~55 Hz (2) Total amplitude = 1.5 mm (3) Sweep ratio: 10~55~10Hz Approx. 1 min. (4) Method of changing the sweep vibration frequency : logarithmic or linear (5) Direction of vibration: Three perpendicular directions including actuating direction. (6)Duration :2 hours @ (6 hours in total)						
5.6	Mechanical Shock	After test, - Contact resistance: 100mΩ Max. - Insulation Res.: 50MΩ Min. - Electrical performance Requirements specified in item 4.3 shall be satisfied. -Operating force: Within ±10%of specified value. -Shall be free from mechanical abnormalities.	Switch shall be measured after following test : (1) Mounting Method : Normal (2) Acceleration : 490m/s ² (50G) (3) Duration : 11 ms (4) Test Direction : 6 directions  (5)Number of shocks :3 times per direction (18 times in total)						
5.7	Solderability	-More than 90% of immersed part shall be covered with solder.	Switch shall be checked after following test : (1) Soldering Temperature : 260 ± 5°C Immersion Time : 3 ± 0.5 s Flux immersing time shall be 5~10s in normal room temperature. (2) Immersion Depth : Immersion depth shall be at copper plating portion of PCB after mounting. (Thickness of PCB = 1.6mm)						
5.8	Solder Heat Resistance	-No abnormalities shall be observed in appearance and operation. -The electrical performance requirements specified in item 4.3 shall be satisfied.	Switch shall be measured after following test : (1) Soldering Temperature & Immersing Time <table border="1" data-bbox="938 1704 1369 1771"> <tr> <td>Dip Soldering</td> <td>260±5°C</td> <td>5±1s</td> </tr> <tr> <td>Manual Soldering</td> <td>350±10°C</td> <td>3~4s</td> </tr> </table> (2) Immersion Depth:(For Dip Soldering) Immersion depth shall be at copper plating portion of PCB after mounting. (Thickness of PCB = 1.6mm.)	Dip Soldering	260±5°C	5±1s	Manual Soldering	350±10°C	3~4s
Dip Soldering	260±5°C	5±1s							
Manual Soldering	350±10°C	3~4s							

Customer P/N:	Toneluck P/N: PBN-3-17.5H-0116	Project Code:
Product Version: A1	Issued Date: 2022-11-16	Page 3 of 6

6.Durability Characteristics

✕	Item	Criteria	Test Method
6.1	Operating Life with Load	After test, - Contact resistance: 100mΩ Max. - Insulation Res.: 10MΩ Min. - Electrical performance requirements specified in item 4.3 shall be satisfied. - Operating force shall be within ±10% of specified value. - The switch shall be free from abnormalities in appearance & construction.	Operation shall be performed continuously at a rate of 15~30 cycles per minute with load as follow : (1) 0.1A 30VDC 10,000 cycles (2) 1A 25VDC 5,000 cycles

7.Weather Proof Characteristics

✕	Item	Criteria	Test Method
7.1	Cold Proof	After test, - Contact resistance: 100mΩ Max. - Insulation Res.: 10MΩ Min. - Electrical performance requirements specified in item 4.3 shall be satisfied. - Operating force shall be within ±10% of specified value. - The switch shall be free from abnormalities in appearance & construction.	After testing at $-25 \pm 3^{\circ}\text{C}$ for 96 hours, the switch shall be allowed to stand under normal temperature and humidity conditions for 1 hour, and measurement shall be made within 1 hour after that. Water drops shall be eliminated.
7.2	Hot Proof		After testing at $70 \pm 2^{\circ}\text{C}$ for 96 hours, the switch shall be allowed to stand under normal temperature and humidity conditions for 1 hour, and measurement shall be made within 1 hour after that.
7.3	Moisture Resistance		After testing at $40 \pm 2^{\circ}\text{C}$, 90~95% RH for 96 hours, the switch shall be allowed to stand under normal temperature and humidity conditions for 1 hour, and measurement shall be made within 1 hour after that. Water drops shall be eliminated.
7.4	Temperature Cycling		After 5 cycles of following conditions, the switch shall be allowed to stand under normal temperature and humidity conditions for 1 hour, and measurement shall be made within 1 hour after that. Water drops shall be eliminated.




70±2°C
 Room Temp.
 -25±3°C
 30min, 10~15min, 10~15min, 30min
 1 cycle

Customer P/N:	Toneluck P/N: PBN-3-17.5H-0116	Project Code:
Product Version: A1	Issued Date: 2022-11-16	Page 4 of 6

Material List For PB Push Button Switches

NO	Parts NO	Material And Specifications	Remarks
1	Base	Thermoplastics	
2	Terminal	Brass strip	
3	plate	Thermoplastics	
4	Plunger spring	Carbo Spring steel	
5	Plunger	Thermoplastics	
6	Contact Plate	Brass strip	
7	Contact Spring	Stainless Steel	
8	Frame	Electrolytic Plate	
9	Link	Stainless Steel	
10	Link spring	Stainless Steel	

Customer P/N:	Toneluck P/N: PBN-3-17.5H-0116	Project Code:
Product Version: A1	Issued Date: 2022-11-16	Page 5 of 6

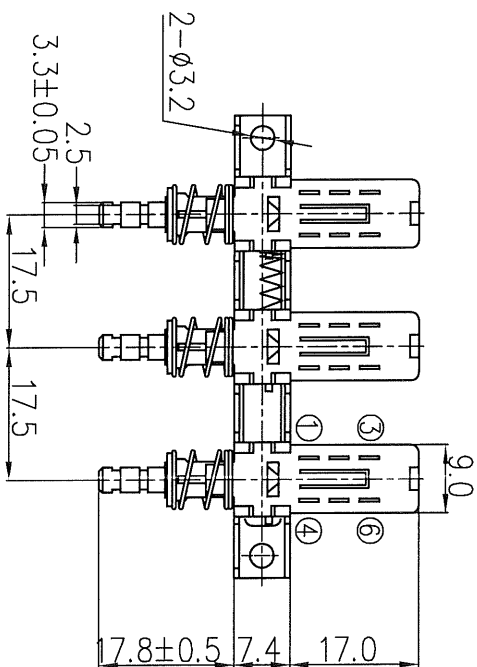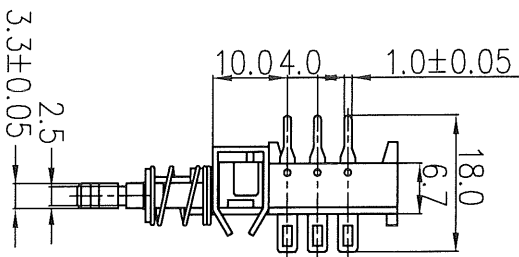

Specifications

1.Mechanical Characteristics:

Item	Criteria
Operating Force	400±100 gf (2P)
Travel to lock	3.50 ^{+0.3} _{-0.8} mm
Overall Travel	4.8±0.5mm

2.Electrical Characteristics:

Ratings:	0.1A/30 VDC OR 1A/25 VDC
Contact Resistance:	50mΩ Max.
Insulation Resistance:	100MΩMin.
Operating Life :	10000 cycles with load 0.1A/30VDC 5000 cycles with load 1A/25VDC
Operating Temperature:	-10°C~+60°C
Dielectric:	1000VAC for 1 minute

4	Link Spring	100#
3	Link	17.5mm-3K
2	Frame	H Model
1	Switch	PBN-N2A35-AAg
NO.	Item	Remark

NO. OF KEY

OA = NON LOCK
 EE = SELF LOCK
 GR = INTER LOCK
 RE = RESET
 TIMING: S= SHORTING
 N= NON SHORTING

PUSH BUTTON SWITCH

TITLE	1	2	3
NO. OF KEY	1	2	3
POLES	2	2	2
TIMING	N	N	N
FUNCTION	GR		
PLUNGER COLOR	WHITE	WHITE	WHITE

MASS PRODUCTION RELEASE

Tolerance Unless Otherwise Specified

-3	>3-10	>10-30	>30-80	>80-180	Angle
±0.20	±0.30	±0.40	±0.60	±0.80	±3°

Unit: mm Size: A4 Scale:

THIRD ANGLE TONELUOK Switches & Control Solutions

Project Ref:	PBN Push Button Switch
Part No:	PBN-3-17.5H-0116
Drawing No:	- - -
Drafted by:	JiangJie
Checked by:	GanZhenXing
Approved by:	SKY
Date:	2012-11-09